


Manufacturer Lucifer Lighting Company
Model Impact Pathlight
Description small recessed wall-mounted 3000k 43 L pathlight
Driver PSA-24V-60-1AT2 (one driver for three luminaires)
Nominal Power (W)
Dimming Control Reverse Phase
Product Range Impact Pathlight
Test Date 16 September, 2021

Dimmer Tested Against:	UDM-REV	UDS-REV
Commercial Pass/Fail	Pass	Pass
Residential Pass/Fail	Fail	Fail
Best-Fit Power Profile:		
Minimum ON	15	15
Maximum ON	85.5	85
Adjust	100	100
Light Output Range (vs. non-dimmed)		
Maximum (Perceived), 120V	96.1%	96.4%
Minimum (Perceived)	39.3%	42.3%
Minimum (Measured)	15.5%	17.9%

Linearity Curves (Best-fit Power Profile Applied):

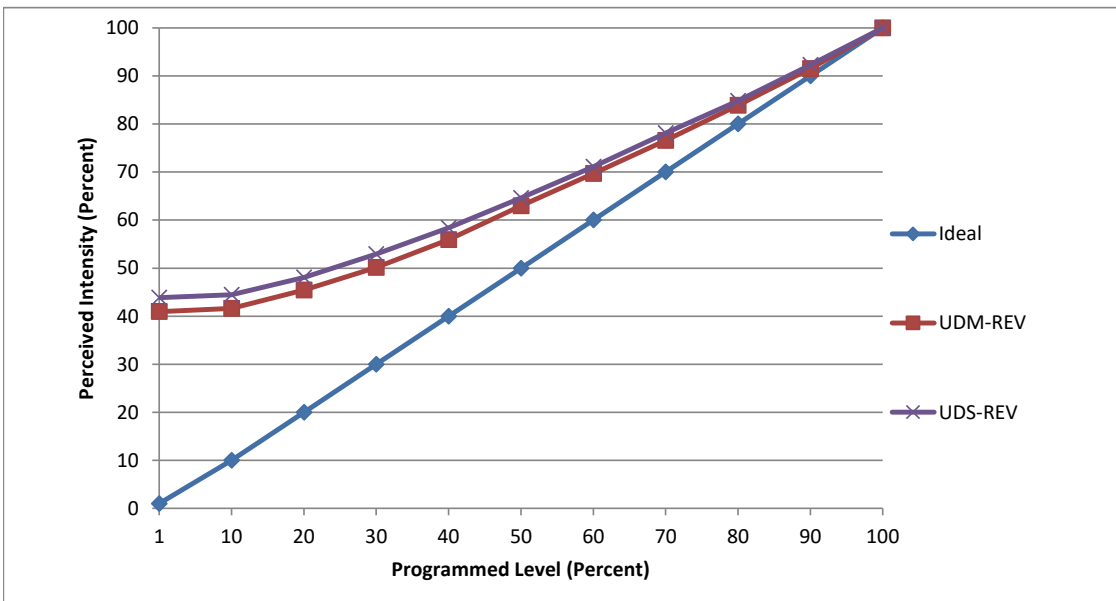

jwm

Observations: Part number tested is: ISL1-1-WH-80L02B30
 Test performed in three LED configuration on one driver.
 Failed for Residential user because of narrow dim window.
 Minimum On raised very high to avoid flicker at low levels.